NOTES:


1. -1 ASSY WEIGHT 2.0 LBS.

INSTALL USING PERMATEX/LOCK TITE THREAD LOCKER (RED) P/N 26250 PER MFG INSTRUCTIONS.



ALT. STOCK: -10 & -11 CAN BOTH BE MADE FROM ONE 1 X 6 RECTANGLE, $6\frac{1}{2}$ LONG.

SHEET	RE∨	ECD	DATE	DESCRIPTION		APR	CHK
1,2	Α		04/29/09	N□TE 1 WAS 1.8 LBS11: ADDED 0.020±0.005, 0.026±0.005 DIMS & RMV'D +0.006, 0.480, 0.271 DIMS. CRCT'N: -10 WAS 0.2 LBS.		REB	LS
1,2	В		10/19/2010	CORRECTED STOCK SPEC, -10 BLOCK;ADDED ⚠ REVISE -12 DWG. FOR CLARITY, ADDED 125 SPEC.	REB	REB	LS
1,2	С			CORRECTED EDGE VIEW -11 BLOCK, WAS MIRRORED ADDED -13 GROUND STRAP, SHEET 3	REB	REB	LS
1		1	12/26/2017	MS21209-F4-20 DESCRIPTION WAS "1/4-20" THREAD.	EW	JT	LS
1		2	07/09/2018	REMOVED -12 GROUND STRAP FROM -1 ASSY.	EW	ZA	LS
2	D		06/24/2022	CLARIFIED THAT DRILL DPETH SPECIFICIED ON -10 BLOCK	ΑD	МН	ΑD

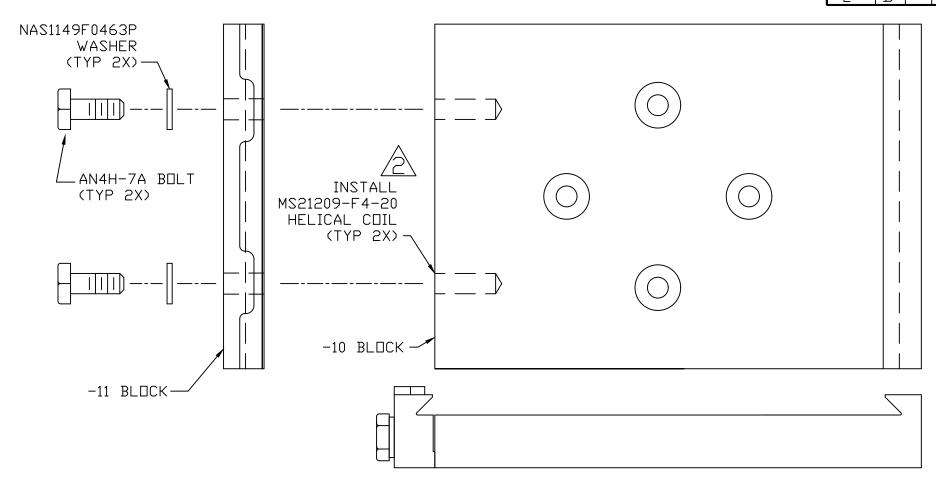

-1 M□UNT]	BLOCK	ASSEMBLY
------------	-------	----------

	a	MS21209-F4-20	1/4-28 HELICAL CDIL, DR EQUIV.
	2	NAS1149F0463P	WASHER
	2	AN4H-7A	BOLT
2		MS25036-157	TERMINAL
7.25 IN.		WMBD232	3/8-INCH GROUND STRAP, TINNED COPPER
	1	C208ELP-2220-11	BLOCK
	1	C208ELP-2220-10	BLOCK
	QTY	PART NUMBER	DESCRIPTION

-13 -1 ASSY ASSY <u>Paravion[®]</u> Technology Inc. DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED:

.X = ± .1

.XX = ± .05

TITLE DRAWING NO. MOUNT BLOCK C208ELP-2220 ASSEMBLY


PROTO $.XXX = \pm .010$ ANGLES = \pm 1° THREADS: 2


DRAWN APRVD. CHK'D DATE ECO REV BYBY BY BNS REB L2 08/06/08 DO NOT SCALE DRAWING SHEET

© 2018 PARAVION TECH., INC. INTERNAL=CLASS 2B PARAVION IS A TRADEMARK OF EXTERNAL=CLASS 2A PARAVION TECHNOLOGY, INC. 1 DF 3

-CONFIDENTIAL INFORMATION-THE INFORMATION AND DATA CONTAINED HEREIN IS PROPRIETARY AND IS SUBMITTED IN CONFIDENCE; AND SHALL NOT BE DISCLOSED, USED OR DUPLICATED FOR ANY PURPOSE WHATSOEVER WITHOUT THE PRIOR WRITTEN PERMISSION OF PARAVION TECHNOLOGY, INC.

BREAK ALL SHARP EDGES

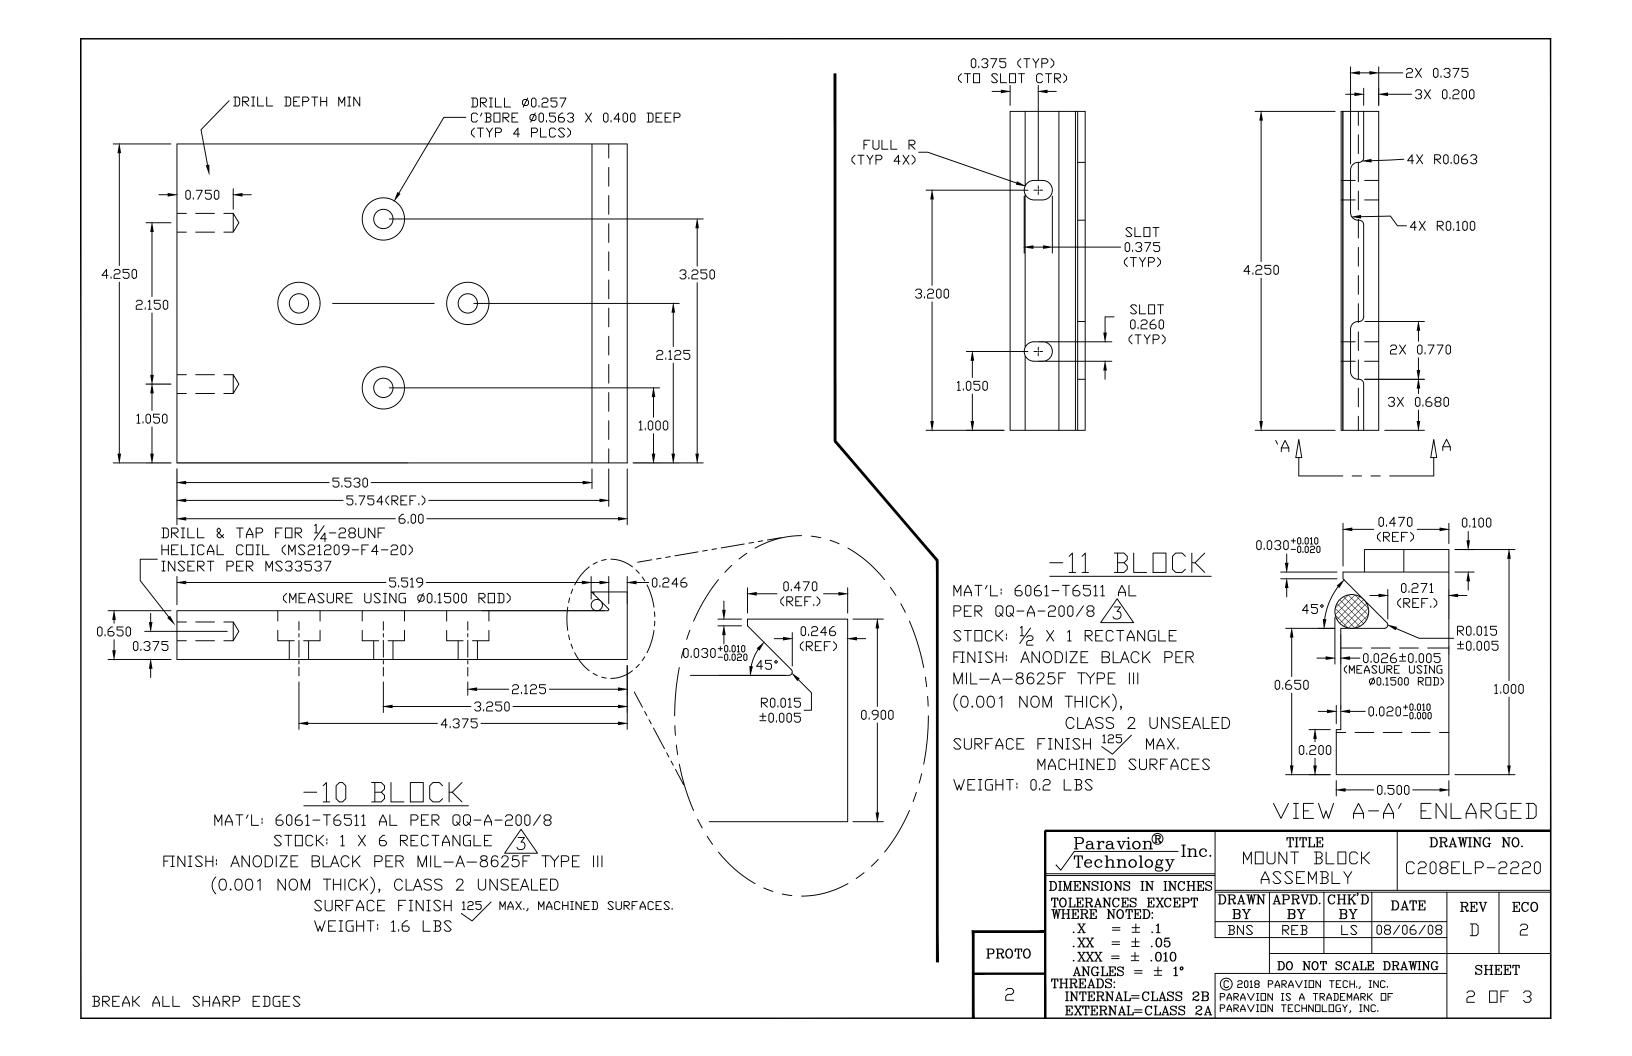

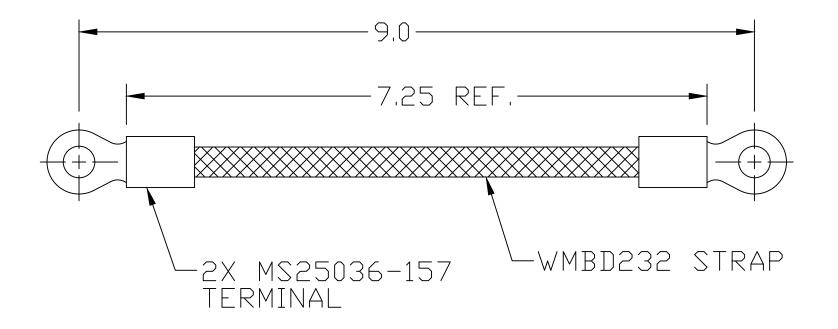

-13 STRAP ASSEMBLY

TEST USING CALIBRATED MILLI-DHM METER: MAXIMUM VALUE 3.0 MILLI-DHM.

	Paravion [®] √ Inc.		TITLE MOUNT BLOCK			DRAWING NO. C208ELP-2220			
		DIMENSIONS IN INCHES	ASSEMBLY						
		TOLERANCES EXCEPT WHERE NOTED:	DRAWN BY	APRVD. BY	CHK'D BY	Г	ATE	REV	ECO
		$X = \pm .1$	REB	REB	LS	7-	21-11	D	2
	PROTO	$.XX = \pm .05$							
		$.XXX = \pm .010$ $ANGLES = \pm 1^{\circ}$	DO NOT SCALE DR			RAWING	SHEET		
		THREADS: INTERNAL=CLASS 2B EXTERNAL=CLASS 2A	PARAVID) 2018 PARAVION TECH., INC. ARAVION IS A TRADEMARK OF ARAVION TECHNOLOGY, INC.				3 DF 3	

BREAK ALL SHARP EDGES